

Place-A-Vent CR

(Corrosion Resistant)

Place-A-Vent CR is an economical **corrosion resistant** fume extractor that removes corrosive fumes and smoke at their source.

The Place-A-Vent CR comes in three (3) different models to meet requirements of different applications. All models contain a polypropylene fan housing and wheel with stainless steel hardware utilized in assembly. Motors are heavy duty TEFC and come standard with a 8 ft power cord and inline on-off rocker switch. Motor support stand is fabricated from steel and finished with baked enamel paint. Inlet/outlet connectors are flexible PVC and utilize stainless steel clamps. The intake hood is fabricated from PVC and connects to a 24.0" long flexible gooseneck. Support arm (magnetic base is standard; an optional clamp base is available). 12 ft of clear PVC flexible hose is provided and customer to cut to desired intake/discharge length. A stainless steel wall pipe and exterior back draft louver with bird screen made from polypropylene with an UV inhibitor is also provided (see photo above). Longer flexible PVC hose lengths available. Please consult factory with any questions.




CR-150 Shown



Inline on-off Rocker Switch

Model	Hp	RPM	Ph/Hz/Volts	cfm@0.0"w.g.	Hood Size (in.)	Flex Hose (ft.)	Inlet/Outlet (in.)	Price
CR-150	1/3	3450	1/60/115-230	165	10.0 x 4.0	12.0	4.0 dia.	\$1,480.00
CR-600	1/2	3450	1/60/115-230	600	14.0 x 6.0	12.0	6.0 dia.	\$2,035.00
CR-1000	1/3	1725	1/60/115-230	1000	14.0 x 6.0	12.0	6.0 dia.	\$2,265.00

Fan Performance Curves

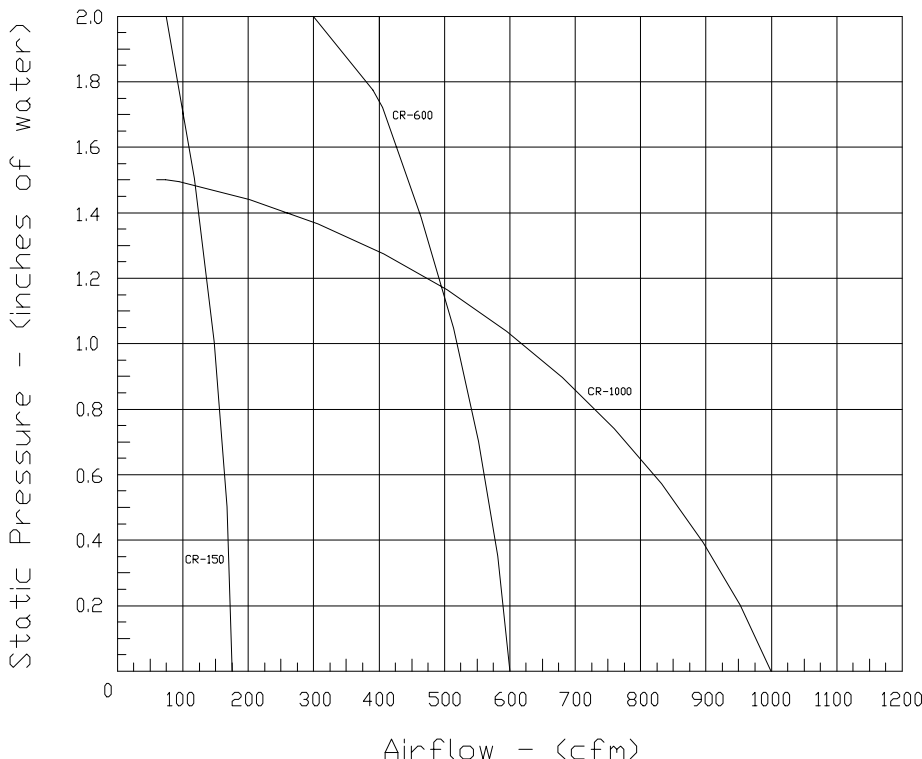

Place-A-Vent CR System Features:

- Easy to install - all mounting components included
- Can be easily moved to a different location
- Can be modified for multiple work stations
- Larger volume fans and TEXP motors available
- One year warranty

Vent-A-Kiln Corporation
 51 Botsford Place – Buffalo, NY 14216
 Phone: (716) 876-2023 – Fax: (716) 876-4383
 E-mail: info@ventafume.com
 Website: www.ventafume.com